

Quick Connection Couplings Storz System for Liquids, Powders and Granulates


Symmetrical quick connection coupling, no female and male part, no problem with matching hose ends. Assembly and functionality of couplings Storz System.

Quick connection couplings with DS suffix generally are suitable for delivery and suction operation, without DS suffix for delivery operation only.

Working pressure is PN 16 if not mentioned otherwise.

- Aluminium alloys (A)
- Copper alloys (C)
- High grade steel (St)

External binding with wire

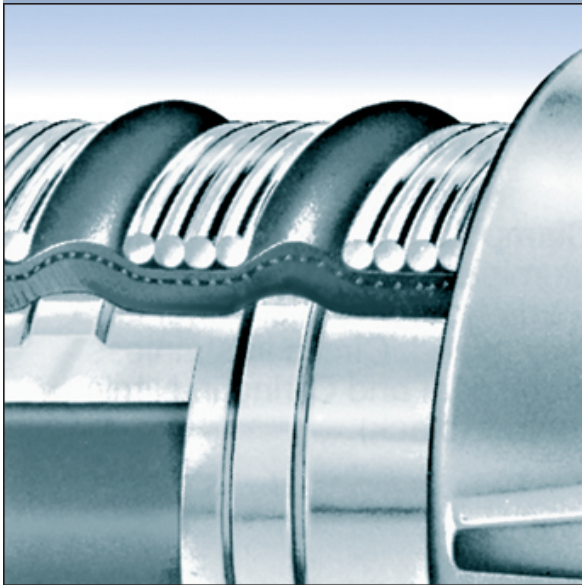

1009 A

In European fire fighting practice it is usual to bind hoses for delivery and suction operation with wire. The wire is applied by means of a manual operated binding device as pictured. Electric hose binding machines are recommended if relatively large numbers have to be bound (price on request).



1009 B



1009 C

Length (m)	Thickness (mm)	Weight (kg)	Ident.No.	Remarks	Alloy
ca. 125	1,4	1,500	60361648	Style 1009 A: Binding wire for delivery hoses	A
ca. 70	1,8	1,500	60361748	Style 1009 A: Binding wire for suction hoses	A
		1,040	60361848	Style 1009 B: Binding device	A
		4,020	60361948	Style 1009 C: Mechanical coupling device	A